



Thin cup goes on top of the washer





Thrust bearing sits in the cup



Fit the thick or thin washer supplied on top of the thrust bearing



Large cup sits on top of the stub axle

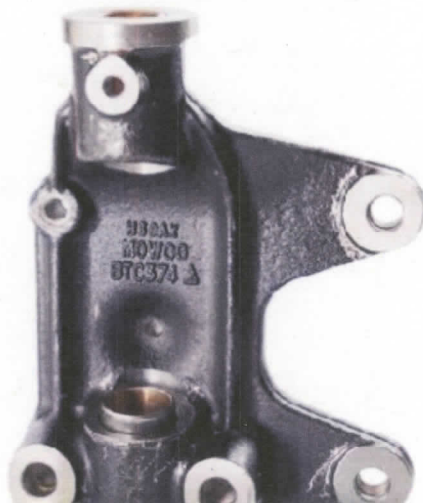

You assemble the SUF125 onto the car and gease it all, put the whole assembly together onto the stub axle and tighten everything, check for the 0.002" up and down free play, you may have to use the standard steel shims to get the correct free play as per the manual.

187P1
1/4 of 1 flat
~15°